

GRUPPO INCASSO PLUS
GREEN TECH

Version
Plus - Built-in - 50 cm - Inox -
800 m3/h

Designer

Collection
Design


EAN code
8034122367286

FEATURES

- Perimeter suction
- Electronic control
- Metallic grease filter, removable and washable
- Charcoal filter (optional)
- Remote control (optional)
- Dimmable lighting
- Dynamic Light (2700K - 5600K)
- Green Tech Motor
- Dialogue system

OPTIONAL ACCESSORIES

- 103050093**
Charcoal Filter Ø192mm
- 105080053**
Remote control



TECHNICAL FEATURES

- Installation type**
Built-in
- Dimensions**
50 cm
- Finishing**
Scotch brite stainless steel (AISI 304)
- Motor**
800 m³/h
- Type of control**
Electronic control
- Speed**
3 + boost
- Lighting**
Led 2x1,7 W - 2700 K / 5600 K
- Minimum distance**
Gas hob: 62 cm
Electric hob: 52 cm



The photograph is purely for information
It may not correspond to the selected version.

PACKAGING:WEIGHTS AND
VOLUMES

- Gross weight**
9.5 kg
- Net weight**
7.6 kg
- Volumes**
0.09 m³
- Packaging size**
Length
610 mm
Height
380 mm
Depth
375 mm

CONSUMPTION AND
CONNECTION FEATURES

- Maximum consumption**
280 W
- Voltage**
220-240V
- Frequency**
50-60Hz

MOTOR TECHNICAL SHEET

- Maximum capacity**
620 m³/h
I.E.C. 61591
- Maximum noise level**
66 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)**
430 Pa
- Max. motor power**
130 W
- ENERGY CLASS**
A+

GRUPPO INCASSO PLUS
GREEN TECH

Version
Plus - Built-in - 50 cm - Inox -
800 m3/h

Designer

Collection
Design

EAN code
8034122367286

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	47		61	66
Capacity (m3/h) I.E.C.61591	205		500	620
Maximum pressure (Pa)	170		330	430
Power (W)				130
Air outlet	150	150	150	150

GRUPPO INCASSO PLUS
GREEN TECH


Version
Plus - Built-in - 50 cm - Inox -
800 m3/h

Designer

Collection
Design

EAN code
8034122367286

ENERGY LABEL

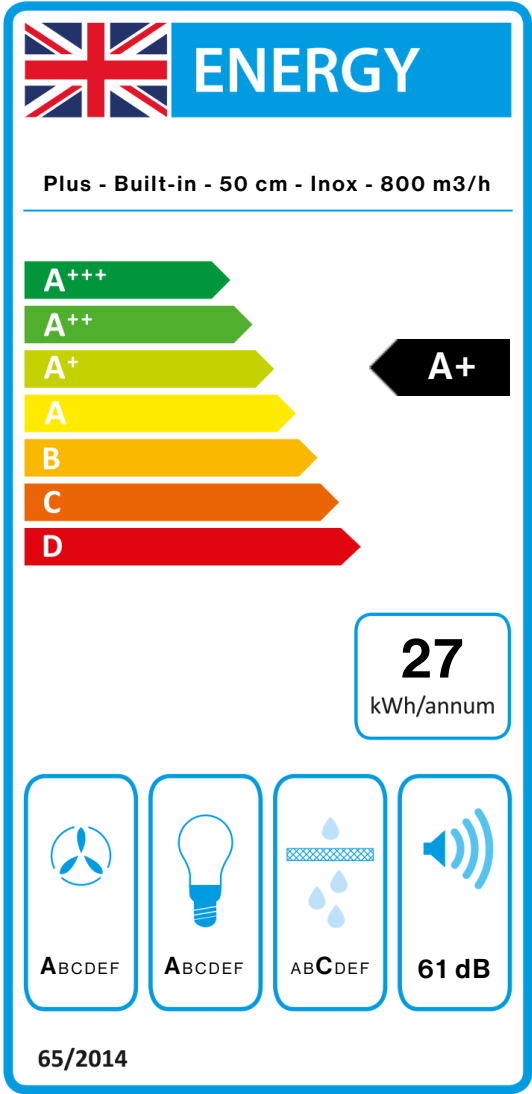

PF		
S	Falmec Spa	
M	Plus - Built-in - 50 cm - Inox - 800 m3/h	
AEC	26,6	kWh/a
EEC	A+	
FDE	36,5	
FDEC	A	
LE	32,9	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	205,0	m³/h
Qmax	500,0	m³/h
Qboost	620,0	m³/h
SPEmin	47	dBa
SPEmax	61	dBa
SPEboost	66	dBa
PO	-	W
PS	0,28	W

PI		
F	0.7	
EEL	38,6	
Qbep	353,0	m³/h
Pbep	350	Pa
Qboost	620,0	m³/h
Wbep	94,0	W
WL	3,50	W
Emiddle	115	lux
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). PI_Additional information according to 66/2014 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point /

Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.